



晶采光電科技股份有限公司
AMPIRE CO., LTD.

Specifications for LCD module

Customer	
Customer part no.	
Ampire part no.	AM-1280800Q1TZQW-T00H
Approved by	
Date	

☐ Approved For Specifications

☐ Approved For Specifications & Sample

AMPIRE CO., LTD.

4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)


新北市汐止區新台五路一段 116 號 4 樓(東方科學園區 A 棟)

TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270

Approved by	Checked by	Organized by

RECORD OF REVISION

Revision Date	Page	Contents	Editor
2017/12/15	--	New Release	Mark



ADELSYS

ADVANCED ELECTRONIC SYSTEMS

1. GENERAL DESCRIPTION

The screen format is intended to support 1280(H) x 800(V) screen and 16.7M (RGB 8-bits)

1.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Item	Specifications	unit
Screen Diagonal	12.1	inch
Display resolution(dot)	1280 (RGB) x 800	dots
Display area	261.12 (W) x 163.2 (H)	mm
Pixel pitch	0.204(W) x 0.204 (H)	mm
Color configuration	R.G.B Vertical stripe	
Overall dimension	298.0(W) x 204.0(H) x 15.475(D)	mm
Display Mode	Transmissive, Normally Black	
Brightness	1000	cd/m ²
Backlight unit	LED	
Display color	16.7M	colors
Electrical Treatment	1 channel LVDS	

Note(1) Viewing direction for best image quality is different from TFT definition; there is a 180 degree shift.

Note(2) LCM weight tolerance : $\pm 5\%$

2. Input/output Terminals

2.1 TFT LCD Panel

Mating Connector: 093G30-B0001A-G4 (Starconn) or compatible

12	Name	I/O	Description
1	NC	-	No Connection
2	NC	-	No Connection
3	NC	-	No Connection
4	NC	-	No Connection
5	NC	-	No Connection
6	NC	-	No Connection
7	GND	P	Power ground
8	GND	P	Power ground
9	VDD	P	Power Supply +3.3V
10	VDD	P	Power Supply +3.3V
11	GND	P	Power ground
12	GND	P	Power ground
13	Rxin0-	I	-LVDS differential data input(R0~R5,G0)
14	Rxin0+	I	+LVDS differential data input(R0~R5,G0)
15	GND	P	Power ground
16	Rxin1-	I	-LVDS differential data input(G1~G5,B0~B1)
17	Rxin1+	I	+LVDS differential data input(G1~G5,B0~B1)
18	GND	P	Power ground
19	Rxin2-	I	-LVDS differential data input(B2~B5,-,DE)
20	Rxin2+	I	+LVDS differential data input(B2~B5,-,DE)
21	GND	P	Power ground
22	RxCLK-	I	-LVDS differential data input
23	RxCLK+	I	+LVDS differential data input
24	GND	P	Power ground
25	Rxin3-	I	-LVDS differential data input(R6~R7,G6~G7,B6~B7)
26	Rxin3+	I	+LVDS differential data input(R6~R7,G6~G7,B6~B7)
27	GND	P	Power ground
28	NC	-	No Connection
29	GND	P	Power ground
30	GND	P	Power ground

Note: I/O definition:

I-----Input P-----Power/Ground

3 Absolute Maximum Ratings

3.1 Driving TFT LCD Panel

Item	Symbol	MIN	MAX	Unit	Remark
Voltage Input	VDD	-0.5	5.0	V	Note1
Operation Temperature	TOP	-20	70	°C	
Storage Temperature	TST	-30	80	°C	
LED backlight power supply	VF	-0.3	22	V	
LED backlight driving current	IF	-	600	mA	
Relative Humidity (Note2)	RH	--	≤95	%	Ta ≤ 40°C
		--	≤85	%	40°C < Ta ≤ 50°C
		--	≤55	%	50°C < Ta ≤ 60°C
		--	≤36	%	60°C < Ta ≤ 70°C
		--	≤24	%	70°C < Ta ≤ 80°C
Absolute Humidity	AH	--	≤70	g/m ³	Ta > 70°C

Table 3.1 absolute maximum rating

Note(1) Input voltage include Rxin0-/+, Rxin1-/+, Rxin2-/+, Rxin3-/+, RxCLK-/+, SEL6/8, VDD.

Note(2) Ta means the ambient temperature. It is necessary to limit the relative humidity to the specified temperature range. Condensation on the module is not allowed.

4. ELECTRICAL CHARACTERISTICS

4.1 Driving TFT LCD Panel

VDD=3.3V, GND=0V, Ta=25°C

Item		Symbol	Min	Typ	Max	Units	Remark
Power supply Voltage		VDD	3.0	3.3	3.6	V	
Power supply ripple		V _{P-P}	-	-	100	mV	
Power supply current		I _{DD}	-	TBD	-	mA	
Power consumption		P	-	TBD	-	mW	Note 1
Differential input voltage		V _{id}	200	-	600	mV	
Differential input common voltage		V _{cm}	-	1.2	-	V	
Differential input threshold voltage	Low level	V _{TL}	-100	-	-	mV	
	High level	V _{TH}	-	-	100	mV	
Inrush Current		I _{rush}	--	--	1.5	A	

Table 4.1 LCD module electrical characteristics

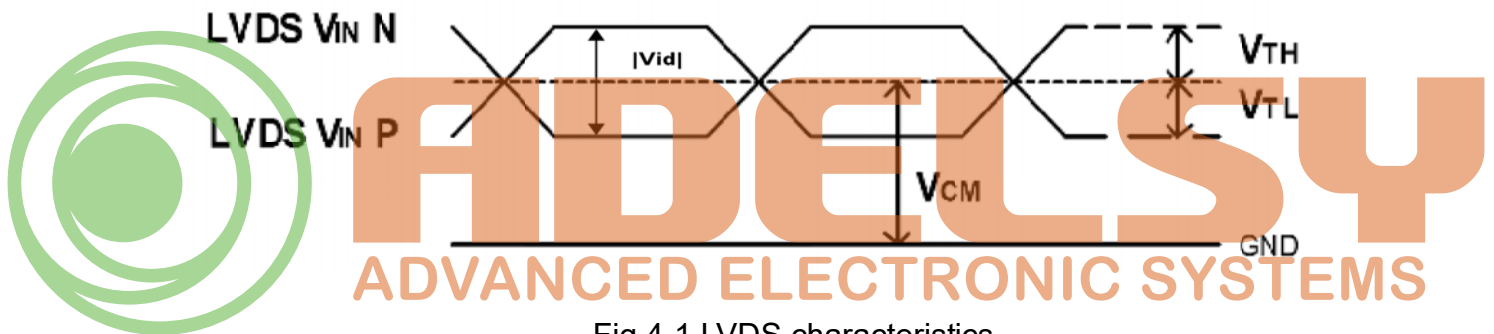



Fig 4.1 LVDS characteristics

Note(1) To test the current dissipation, using the “white pattern” shown.

4.2 Driving Backlight

Input signals shall be low or Hi-Z state when VDD is off.

Item	Symbol	Min.	Typ.	Max	Unit	Remark
LED Backlight forward voltage	VF	-	18	20	V	
LED Backlight forward current	IF	-	-	600	mA	
Backlight power consumption	PLED	-	10.8	-	W	
Operating Life Time	-	-	T.B.D	-	hrs	Note 1

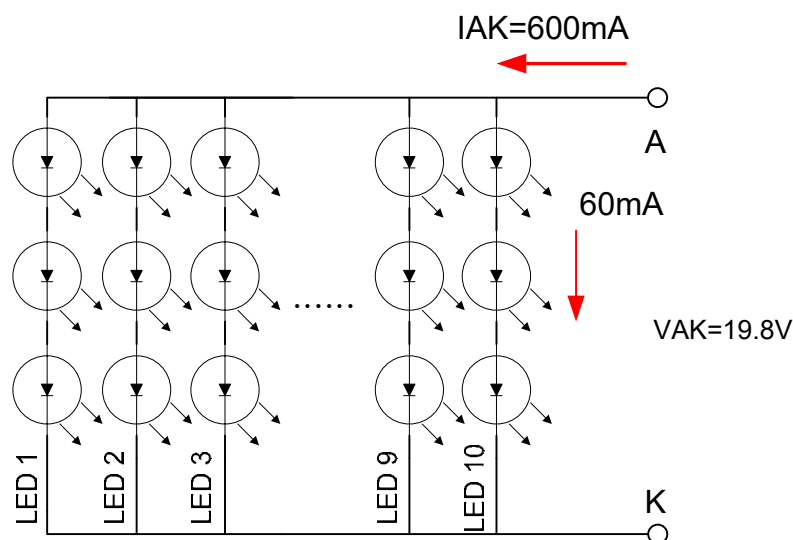


Note(1) Optical performance should be evaluated at $T_a=25^{\circ}\text{C}$ only.

Note(2) If LED is driven by high current, high ambient temperature & humidity condition. The life time of LED will be reduced.

Note(3) Operating life means brightness goes down to 50% of initial brightness. Typical operating life time is estimated data.

Note(4) When LCM is operated over 40°C ambient temperature, the IF should be follow :

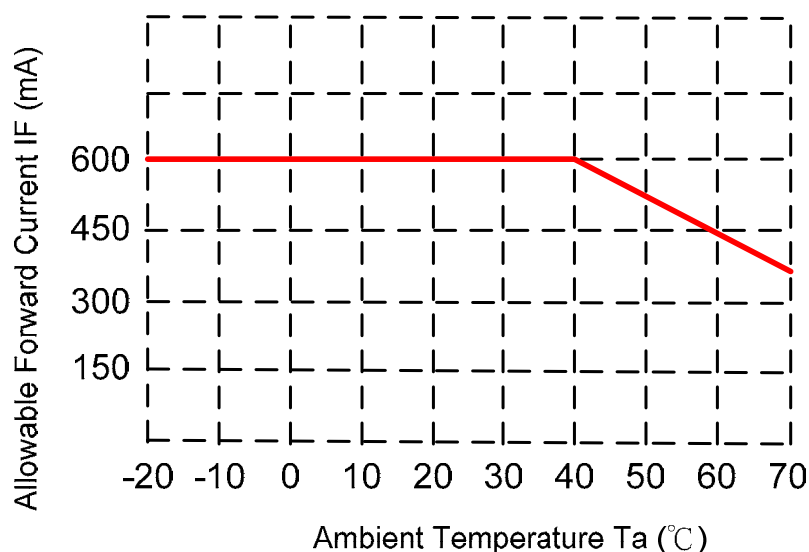

5 Timing Chart

5.1 LVDS signal timing characteristics

VDD=3.3V, GND=0V, Ta=25°C

Parameter	Symbol	Min	Typ	Max	Unit
CLK frequency	$1/t_c$	67	71	75	MHz
Horizontal display area	thd	-	1280	-	tc
Horizontal period	th	1290	1440	-	tc
Vertical display area	tvd	-	800	-	th
Vertical period	tv	810	823	-	th
Frame Rate	F	-	60	-	HZ

5.2 Input Clock and Data timing Diagram:

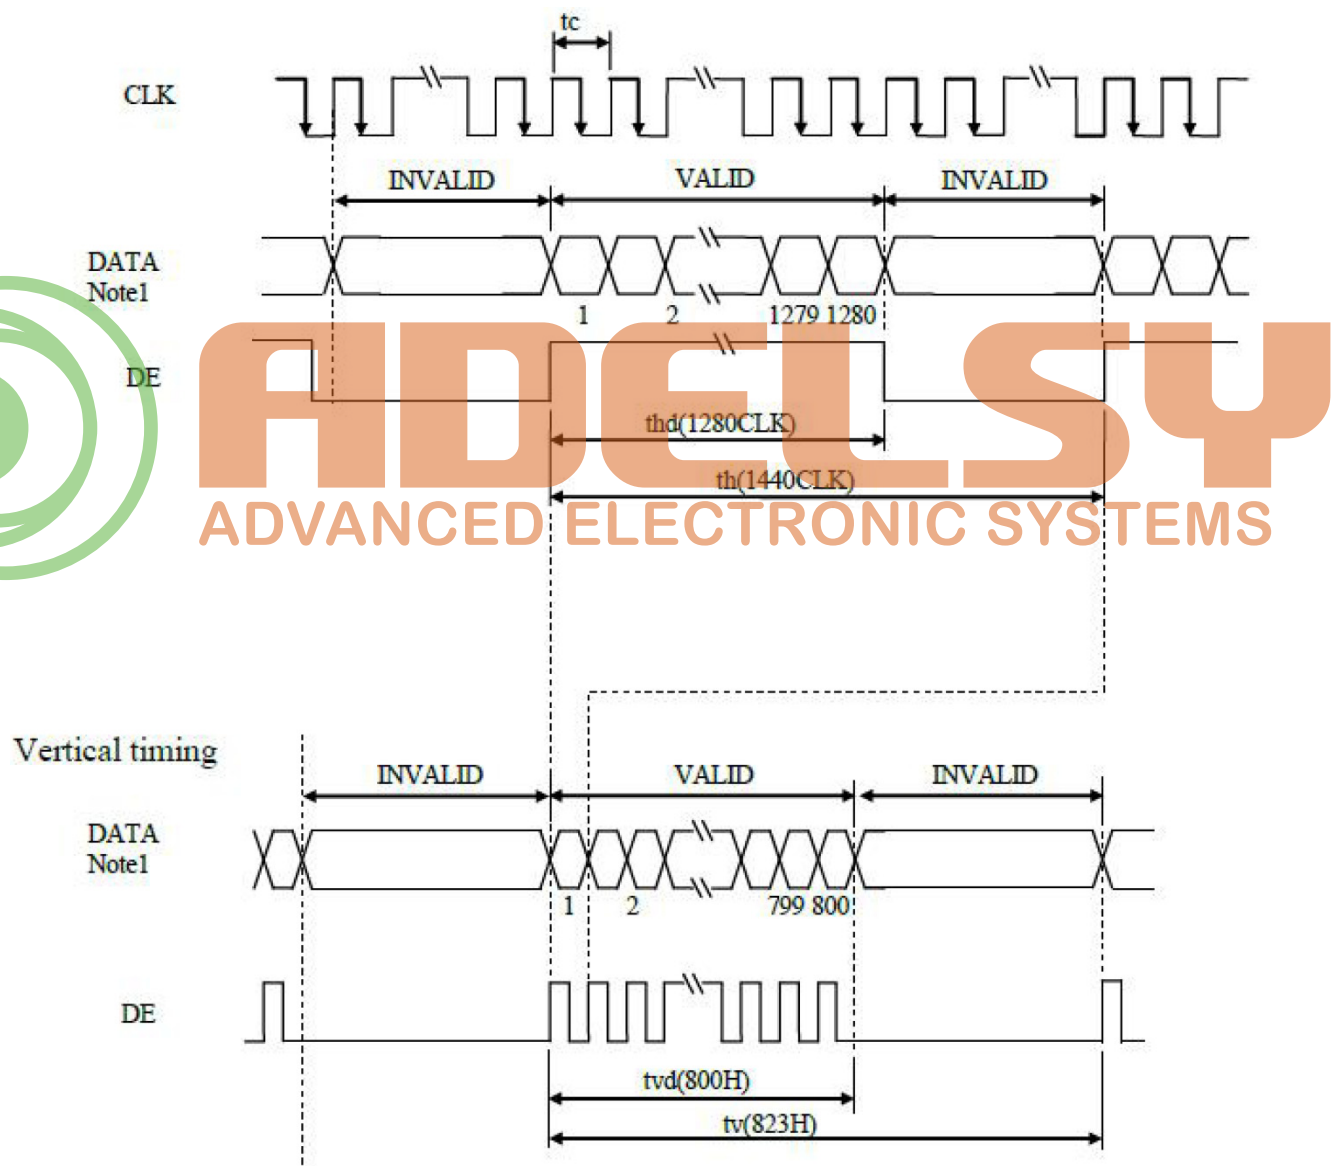


Figure 5.2 Input signal data timing

5.3 LVDS data input format

8-bit mode data input

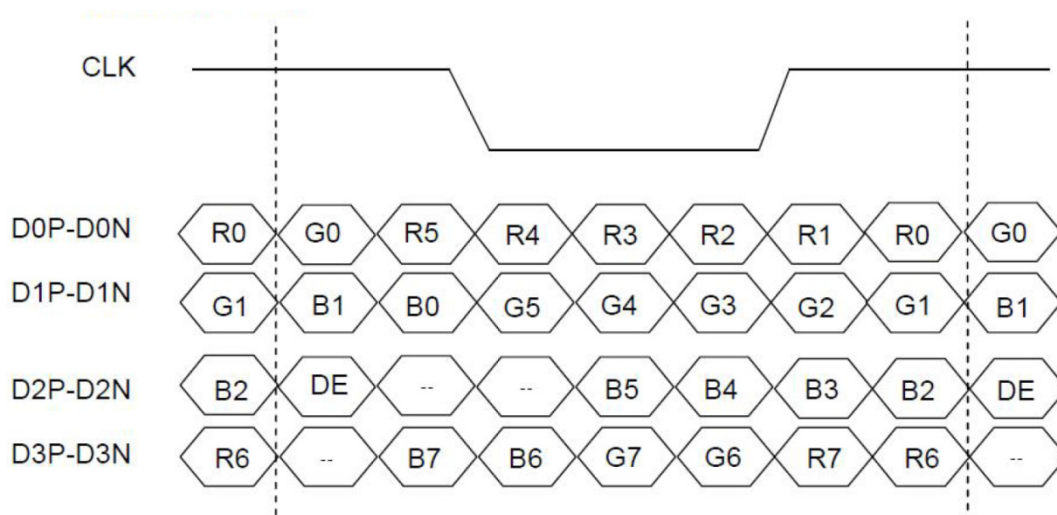


Figure 5.3 LVDS data input format

5.4 Power On/Off Sequence

Item	Symbol	Min	Typ	Max	Unit
VDD on to VDD stable	Tp1	0.5	-	10	ms
VDD stable to signal on	Tp2	0	-	50	ms
Signal on to VLED_EN on	Tp3	200	-	-	ms
PWM on to VLED_EN on	Tp4	0	-	200	ms
VLED to PWM on	Tp5	10	-	-	ms
VLED on to VELD stable	Tp6	0.5	-	10	ms
VDD off time	Tp7	0	-	10	ms
VDD off to next VDD on	Tp8	500	-	-	ms
Signal off before VDD off	Tp9	0	-	50	ms
VLED_EN off before signal off	Tp10	200	-	-	ms
VLED_EN off before PWM off	Tp11	0	-	200	ms
PWM off before VLED off	Tp12	10	-	-	ms

Table 5.4 Power on/off sequence

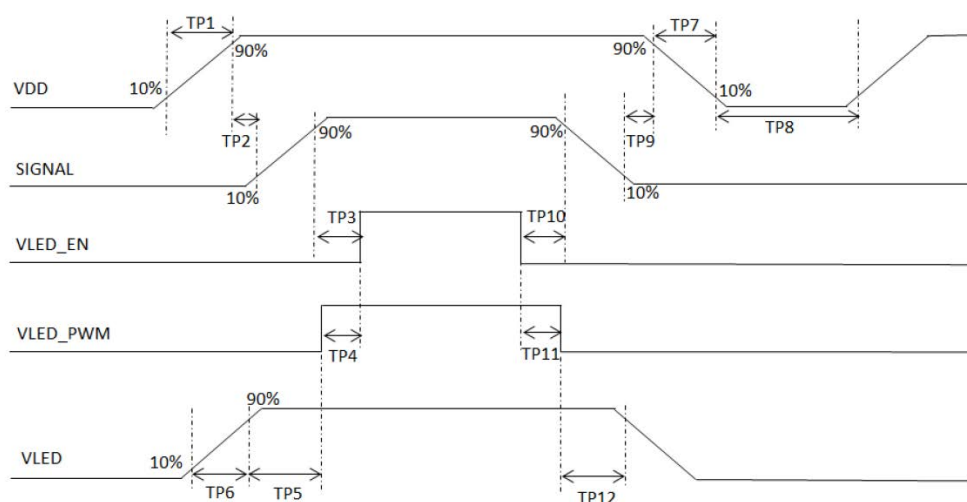


Figure 5.4 Interface power on/off sequence

6 Optical specification

6.1 Optical characteristic of the LCD


Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
View Angles		θT	CR≥10	75	85	--	Degree	Note 2
		θB		75	85	--		
		θL		75	85	--		
		θR		75	85	--		
Contrast Ratio		CR	θ=0°	800	1000	--		Note 1 Mote 3
Response Time		T _{ON}	25℃	--	12	--	ms	Note 1 Note 4
		T _{OFF}		--	13	--		
Chromaticity	White	X	Backlight is ON	0.266	0.316	0.366	--	Note 1 Note 5
		Y		0.300	0.350	0.400		
	Red	X		0.517	0.567	0.617		
		Y		0.299	0.349	0.399		
	Green	X		0.308	0.358	0.408		
		Y		0.507	0.557	0.607		
	Blue	X		0.116	0.166	0.216		
		Y		0.103	0.153	0.203		
Uniformity		U		70	75	--	%	Note 1 Note 6
NTSC				35	40	--	%	Note 5
Luminance		L		800	1000	--	Cd/m ²	Note 1 Note 7

Test Conditions:

1. The ambient temperature is $25 \pm 2^\circ C$. humidity is $65 \pm 7\%$
2. The test systems refer to Note1 and Note 2.

Note(1) Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

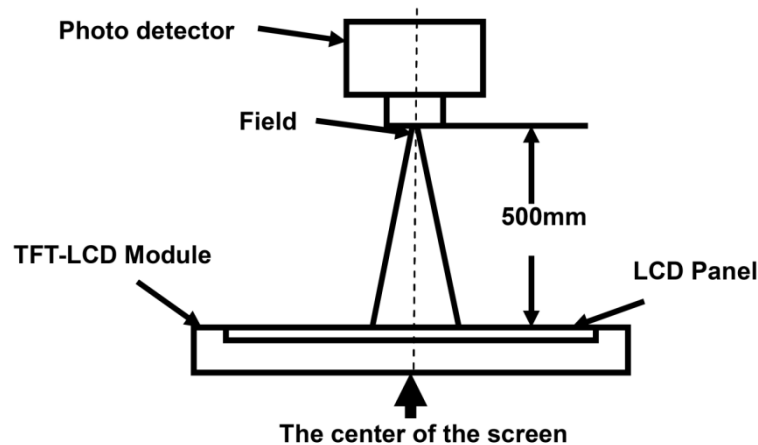

Note(2) Definition of viewing angle range and measurement system.

viewing angle is measured at the center point of the LCD by CONOSCOPE (ergo-80).

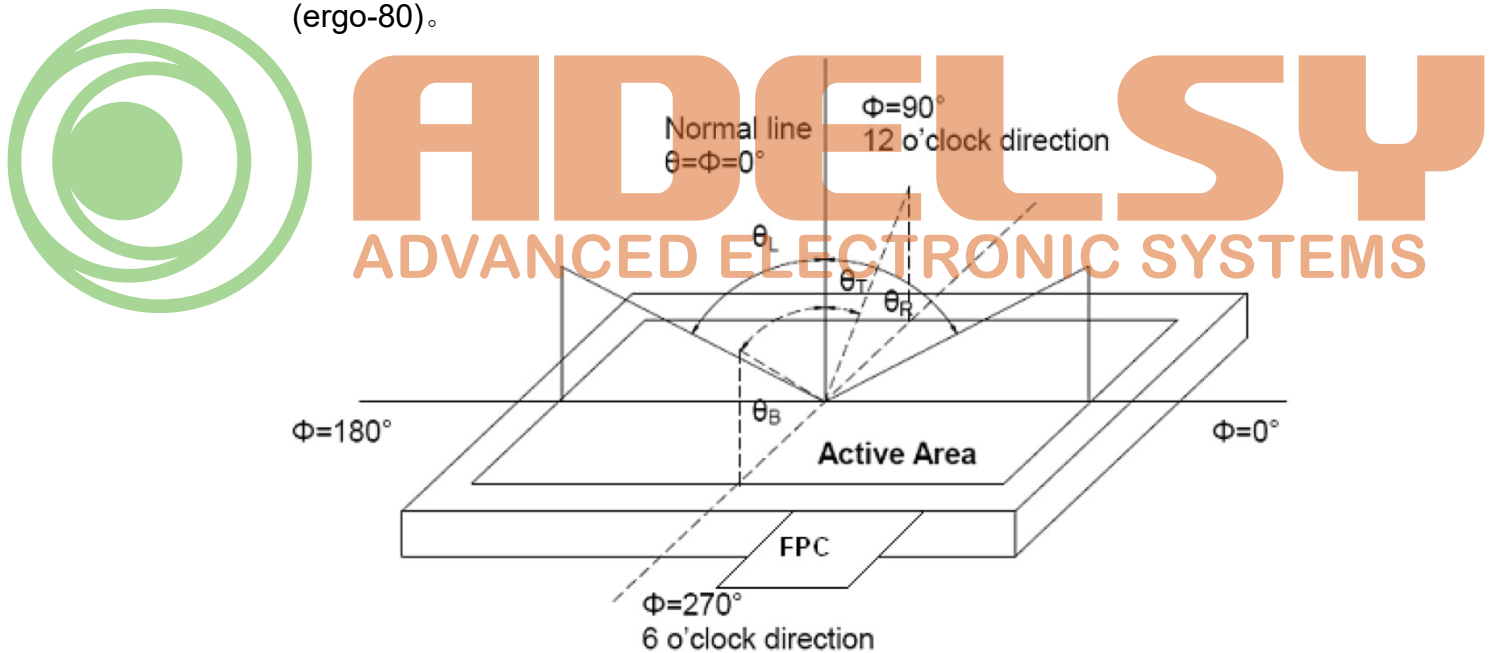


Fig. 1 Definition of viewing angle

Note(3) Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

"White state ": The state is that the LCD should drive by V_{white} .


"Black state": The state is that the LCD should drive by V_{black} .

V_{white} : To be determined

V_{black} : To be determined.

Note(4) Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

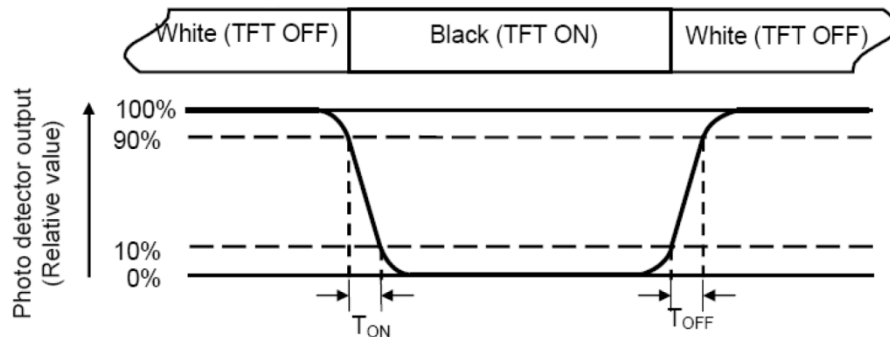

Note(5) Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note(6) Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

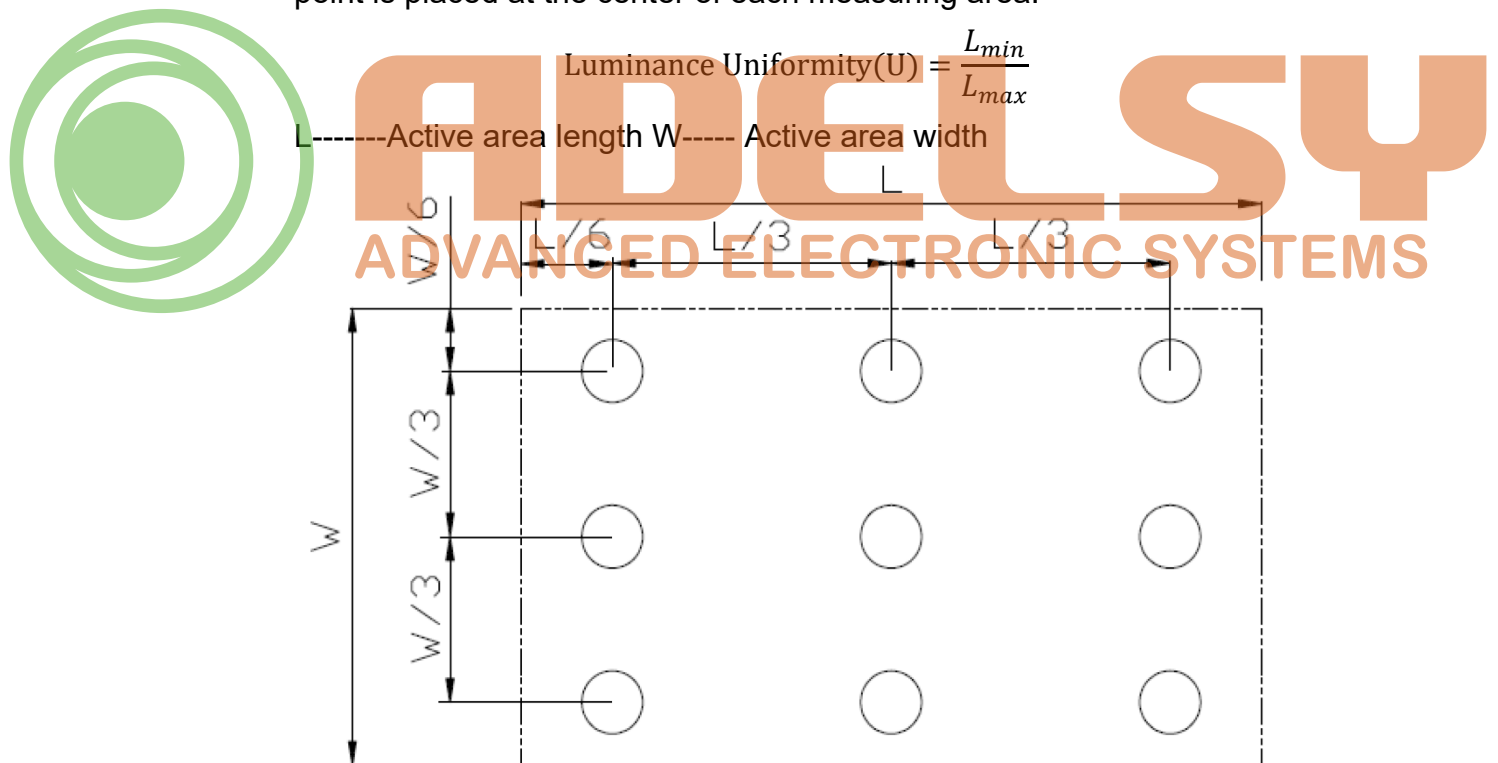


Fig. 2 Definition of uniformity

L_{max} : The measured maximum luminance of all measurement position.

L_{min} : The measured minimum luminance of all measurement position.

Note(7) Definition of Luminance :

Measure the luminance of white state at center point.

7 Projected capacitive-type touch panel specifications

7.1 Basic Characteristic

ITEM	SPECIFICATION
Type	Projective Capacitive Touch Panel
Activation	Two-fingers or Single-finger
X/Y Position Reporting	Absolute Position
Touch Force	No contact pressure required
Calibration	No need for calibration
Report Rate	Approx. 80 points/sec
Control IC	EETI EXC3146

7.2 Electrical Absolute Max Rating

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power supply voltage	VIN	-0.3	5.5	V	GND=0V

7.3 ELECTRICAL CHARACTERISTICS


Specify the normal operating condition
(PGND=0V)

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Power supply voltage	VIN	-	5	-	V	

Interface

CN6		
Pin No.	Symbol	Function
1	GND	Ground
2	DA-	USB Data-
3	DA+	USB Data+
4	VIN	Power supply
5	NA	NC
6	NA	NC

TP needs to work in environment with stable stray capacitance. In order to minimize the variation in stray capacitance, all conductive mechanical parts must not be floating. Intermittent floating any conductive part around the touch sensor may cause significant stray capacitance change and abnormal touch function. It is recommended to keep all conductive parts having same electrical potential as the GND of the touch controller module.

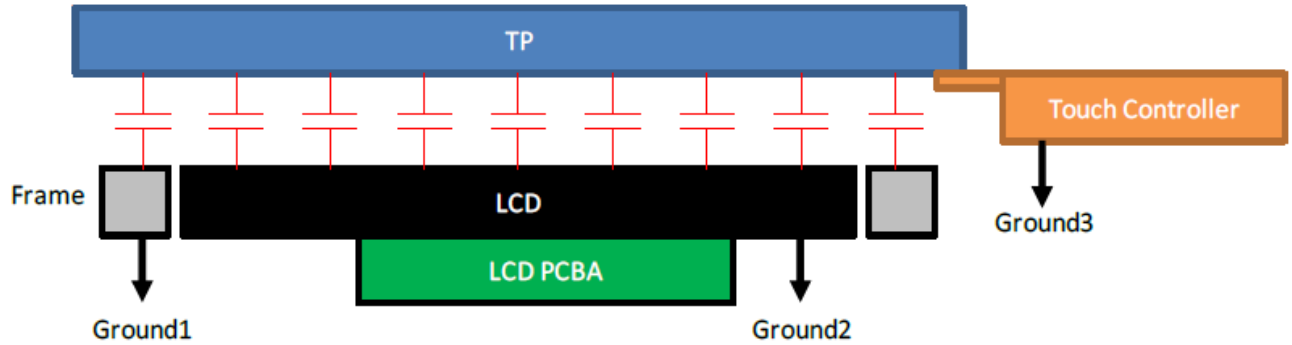

GND1, GND2 and GND3 should be connected together to have the same ground



ADELSY
ADVANCED ELECTRONIC SYSTEMS

8 Reliability Test Items

Test Item	Test Conditions	Note
High Temperature Operation	Ts = 70°C , t=240 hrs	
Low Temperature Operation	Ta = -20°C , t=240 hrs	
High Temperature Storage	Ta = 80°C , t=240 hrs	1,2
Low Temperature Storage	Ta = -30°C , t=240 hrs	1,2
Storage at High Temperature and Humidity	Ta = 60°C, 90% RH , 240 hrs	1,2
Thermal Shock Test	-30°C (30min) ~ 80°C (30min) Change time:5min, 100 cycles	1,2
Vibration Test (Packing)	Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz ~ 55Hz ~ 10Hz 2hours for each direction of X.Y.Z (6 hours total)	2

Note(1) Ts is the temperature of panel's surface.

Note(2) Ta is the ambient temperature of sample.



ADELSY
ADVANCED ELECTRONIC SYSTEMS

9 USE PRECAUTIONS

9.1 Handling Precautions

- (1) The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- (2) If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- (3) Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- (4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- (5) If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcoholSolvents other than those mentioned above may damage the polarizer.
Especially, do not use the following:
 - Water
 - Ketone
 - Aromatic solvents
- (6) Do not attempt to disassemble the LCD Module.
- (7) If the logic circuit power is off, do not apply the input signals.
- (8) To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
- (9) Be sure to ground the body when handling the LCD Modules.
- (10) Tools required for assembly, such as soldering irons, must be properly ground.
- (11) To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
- (12) The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

9.2 Storage Precautions


- (1) When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.
- (2) The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:
Temperature : 0°C ~ 40°C Relatively humidity: ≤80%
- (3) The LCD modules should be stored in the room without acid, alkali and harmful gas.

9.3 Transportation Precautions

- (1) The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

9.4 Mechanical


- (1) Please hold the LCD module properly when you use or store it.

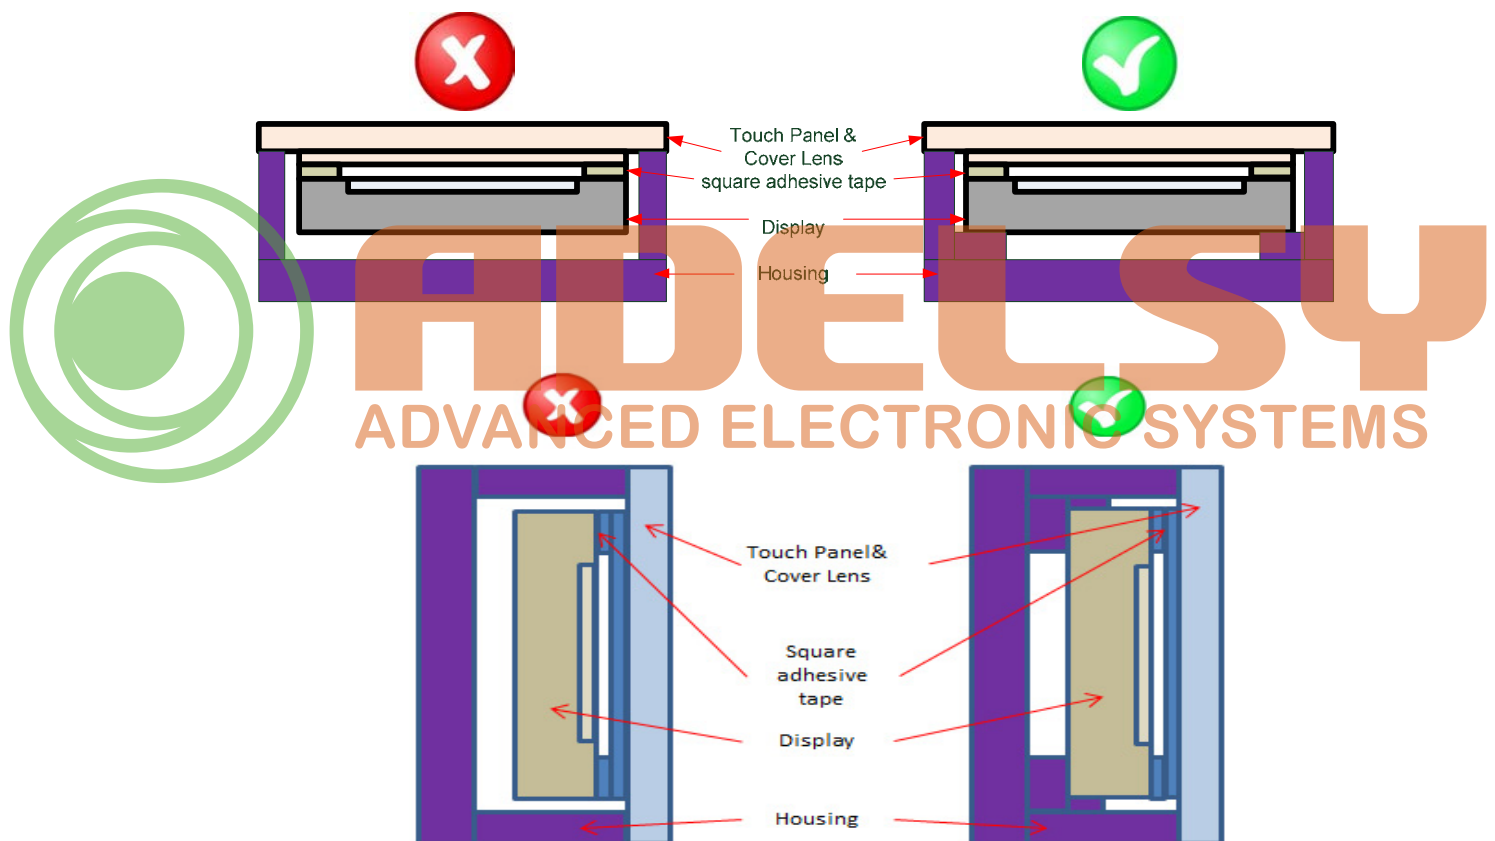

9.5 Other

- (1) AMIPRE will provide one year warrantee for all products and three months warrantee for all repairing products.
- (2) Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.

TOLERANCE GRADE(±)	A	B	DIM.
			JF NO.
			PART'S
			1260




A Block

USB interface:

1	GND
2	DA-
3	DA+
4	VIN
5	NA
6	NA

1. Unless indicated, Tolerance $\pm 0.5^\circ$
2. UV Glue For OLB Protection.
3. LCD 1280x800 (R.G.B) TFT LCD \Rightarrow 12.1" TFT LCD
4. Connector : 093G30-B0001A-G4 (Starcom) or Equivalent.

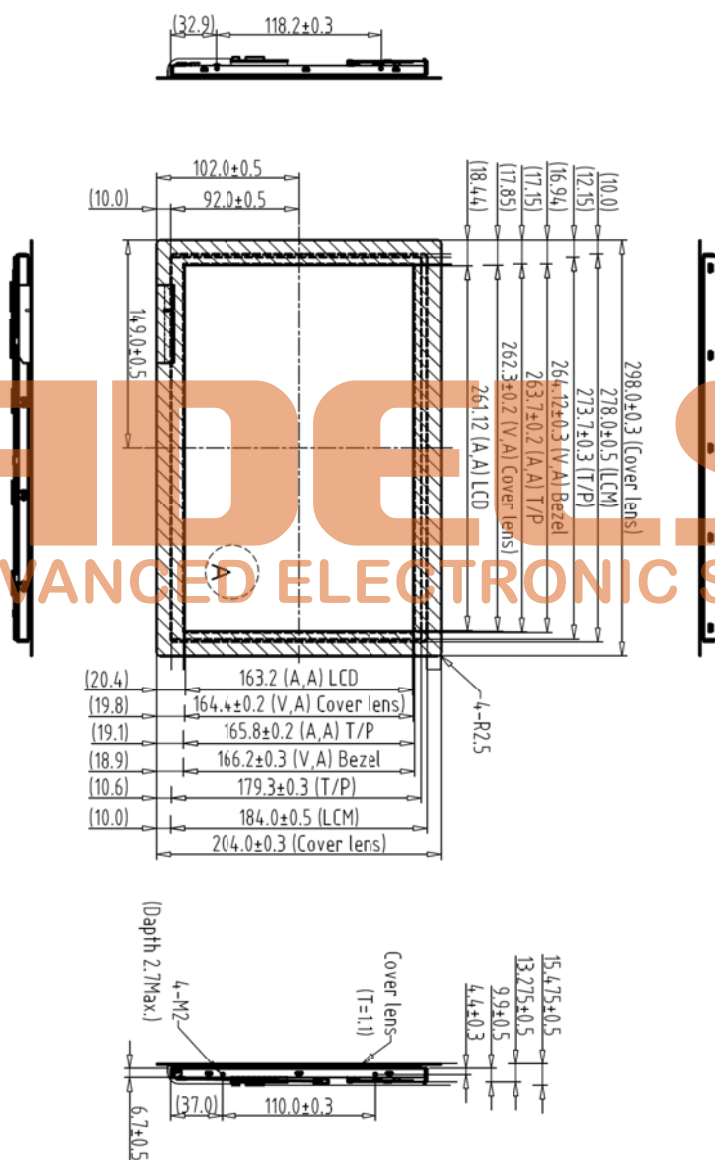

REV	REVISION RECORD	DATE NAME
0	NEW RELEASE	02-14-17 SNOV
1	Rename TF1280800-51-0 to 128080001-T	05-02-17 SNOV

 晶采光電科技 OMIPURE									
TITLE									
1280800Q1-T									
(12.1") IPS									
DATE									
DWG. NO.									
SHEET 1 OF 1									

1	NC	16.RXN1-
2	NC	17.RXN1+
3	NC	18.GND
4	NC	19.RXN2-
5	NC	20.RXN2+
6	NC	21.GND
7	GND	22.RXCLK-
8	GND	23.RXCLK+
9	VDD	24.GND
10	VDD	25.RXN3+
11	GND	26.RXN3-
12	GND	27.GND
13	RXN0-	28.NC
14	RXN0+	29.GND
15	GND	30.GND

Technical drawing of the front view of a lens assembly. The drawing shows a cylindrical lens with a cover lens on top. Dimensions are given in millimeters. The total length is 154.75 ± 0.5. The distance from the front face to the start of the cover lens is 13.275 ± 0.5. The distance from the front face to the center of the lens is 9.9 ± 0.5. The distance from the front face to the end of the cover lens is 4.4 ± 0.3. The distance from the front face to the start of the lens is 6.7 ± 0.5. The distance from the front face to the center of the lens is 110.0 ± 0.3. The distance from the front face to the end of the lens is 37.0. The cover lens has a thickness of 4-M2. The lens has a focal length of f=1.1. The depth is 2.7 max.

Technical drawing showing the front view of the LED module assembly. Key dimensions and labels include:

- Top Dimensions:**
 - Total width: (120.0 ± 10.0)
 - Distance from top edge to center of LED chip: 90.0 ± 0.3 (PCB)
 - Distance from top edge to center of LED chip: 187.7 ± 1.0
 - Distance from top edge to center of LED chip: 298.0 ± 0.3 (Cover lens)
- Bottom Dimensions:**
 - Distance from bottom edge to center of LED chip: 44.0 ± 1.0
 - Distance from bottom edge to center of LED chip: 10.0
 - Distance from bottom edge to center of LED chip: 26.53 ± 1.0
 - Distance from bottom edge to center of LED chip: 204.0 ± 0.3 (Cover lens)
 - Distance from bottom edge to center of LED chip: 40.0 ± 0.3 (PCB)
 - Distance from bottom edge to center of LED chip: 110.0
- Internal Dimensions:**
 - Distance between two LEDs: 59.0 ± 1.0
 - Distance between two LEDs: 30
 - Distance between two LEDs: 1
 - Distance between two LEDs: 5.7
- Labels:**
 - Tape
 - 2-Tape (導電銅箔) / (20.0×20.0)
 - Capton tape (20.0×10.0)
 - White (K)
 - LED (A)
 - 1
 - 1

1. Unless indicated, Tolerance $\pm 0.5^\circ$
2. UV Glue For OLB Protection.
3. LCD 1280x800 (R.G.B) TFT LCD \Rightarrow 12.1" TFT LCD
4. Connector : 093G30-B0001A-G4 (Stromcom) or Equivalent

		TOLERANCE	CADRE (+)	A	B	DIM.	M/M	D/W.N.	S/NOW	DATE	TITLE
1	1280800Q										1280800Q1-T (12.1") IPS
2	1000 mts									02-14-17	
3	Z819Z07Z02 (PCB / USB)									DATE	
4	TF1280800-51-0										
5								PARTS NO. ICM-1	APPD.	DATE	
6								1280800Q1-T			
								DWG. NO.	*170243MA	SHEET 1 OF 1	1

REV	REVISION RECORD	DATE NAME
0	NEW RELEASE	12-14-11 SNOW
1	Rename T1280800-51-0 to 128080001-T	5-02-11 SNOW