


P10600MS070P_T01

7.0 Inches, 1024xRGBx600, 16.7M Colors, Android LCM

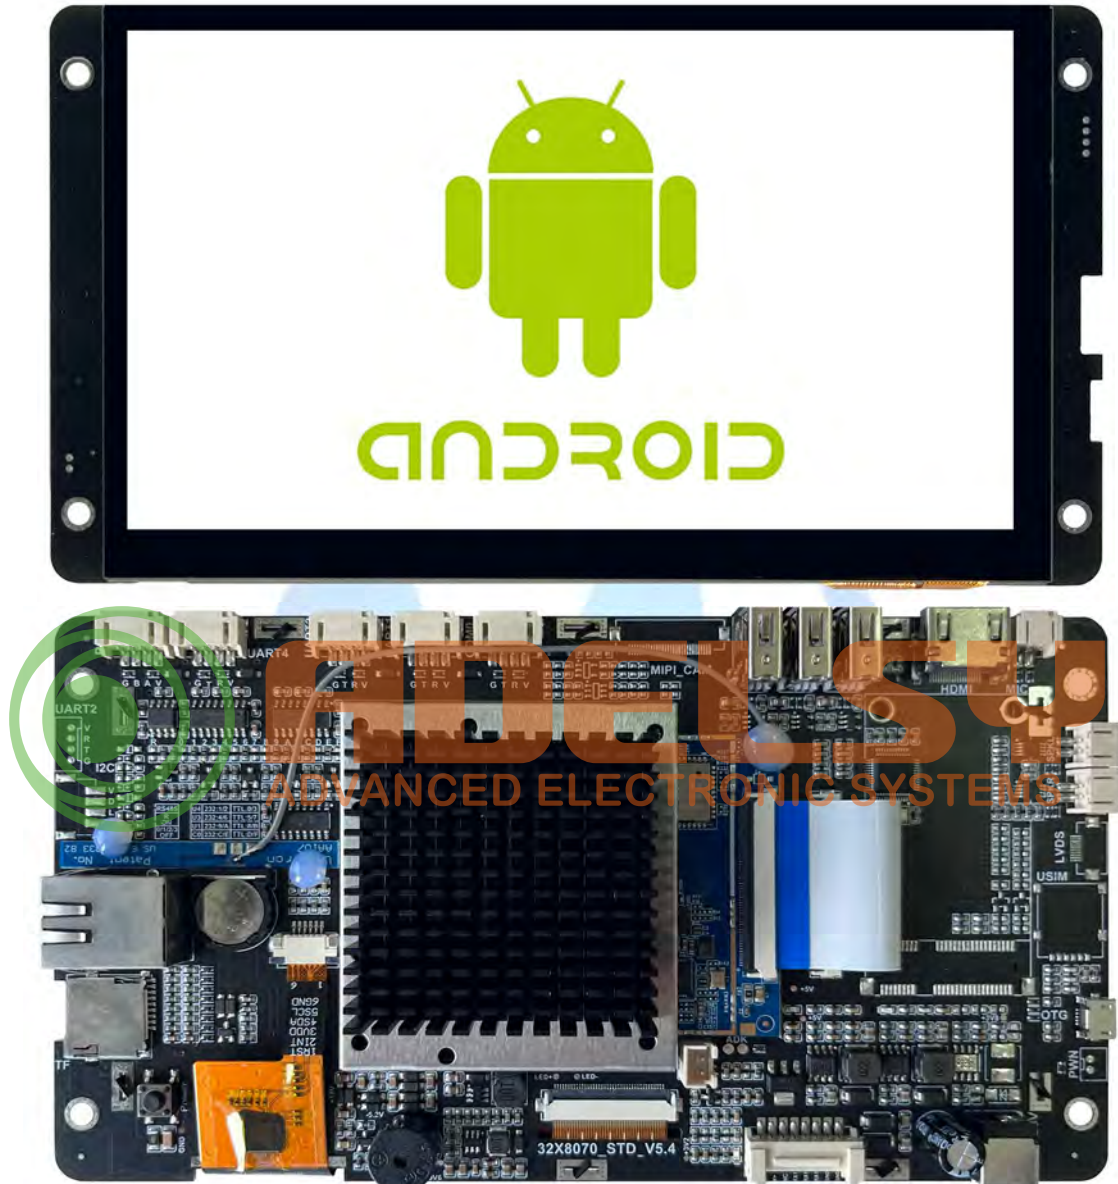


P10600MS070P_T01 is an industrial level Android LCM based on Rockchip RK3288 ARM. It is equipped with Quad-core Cortex-A17, supports most decoding solutions under 1080p@60fps, H.265/H.264/MVC/VP8 solutions under 1080p@60fps and many other great features of Rockchip RK3288. Meanwhile, with good jpeg picture processing performance and 3D GPU, it supports OpenGL ES2.0 and 1.1 OpenVG1.1.

RK3288 has high-performance external memory interface (DDR3/DDR3L/LPDDR2) capable of sustaining demanding memory bandwidths, also provides a complete set of peripheral interface to support very flexible applications.

Core Board						
CPU	1.8GHz Quad-core A17 ARM					
RAM	2GB DDR3					
eMMC	8GB					
GPU	Mali-T764 MP4					
Power Management	ACT8846 PMU					
System Version						
Android	Android 5.1/7.1/8.1					
Ubuntu	Ubuntu 18.04 (Default system is Android. Need to refresh firmware to choose Ubuntu. Apps need to be developed separately.)					
Display						
Color	16.7M (16777216) colors, 24-bit color 8R8G8B.					
Active Area (A.A.)	154.08 mm(W)×85.92 mm(H), 1024×600.					
View Area (V.A.)	155.96 mm(W)×88.87mm(H), 1024×600.					
Resolution	1024×600					
Backlight	LED					
Brightness	350/500/1000					
Optical Specifications						
Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Viewing Angle (CR≥10)	θL	Φ=180° (9 o' clock)	70	80	—	Degree
	θR	Φ=0° (3 o' clock)	70	80	—	
	θT	Φ=90° (12 o' clock)	50	60	—	
	θB	Φ=270° (6 o' clock)	60	70	—	
Voltage & Current						
Item	Condition	Min.	Typ.	Max.	Unit	
Power Voltage		6	12	16	V	
Operation Current	—	—	800	—	mA	

Power Supply	12V 2A DC (Recommended).				
Reliability Test					
Item	Condition	Min.	Typ.	Max.	Unit
Working Temperature	60%RH at 12V voltage	-20	25	70	°C
Storage Temperature	—	-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH
Protection Paint	—	—	None	—	—
Interface					
Item	Condition	Min.	Typ.	Max.	Unit
Baud Rate	Standard	1200	9600	115200	bps
	User Defin	1200	—	115200	bps
Serial Mode	Serial Port*4 (3*RS232/TTL, 1*RS232/TTL/RS485).				
User Interface	Standard serial communication protocol. 8Pin_2.0mm socket.				
USB	USB DEBUG*1. USB HOST*3.				
Ethernet	Support 10m/100m/1000m Ethernet.				
Wi-Fi/Bluetooth	Support 802.11b/g/n Wi-Fi wireless network. Bluetooth is Optional.				
4G LTE Module	4G LTE Module/GPS. (Optional)				
Peripherals					
Microphone	Audio input interface.				
Loudspeaker	2-channel, 4Ω/3W loudspeaker.				
HDMI	HDMI output interface.				
IIC	Reserved				
TF card	Yes				
LVDS	Reserved				

Interface Description

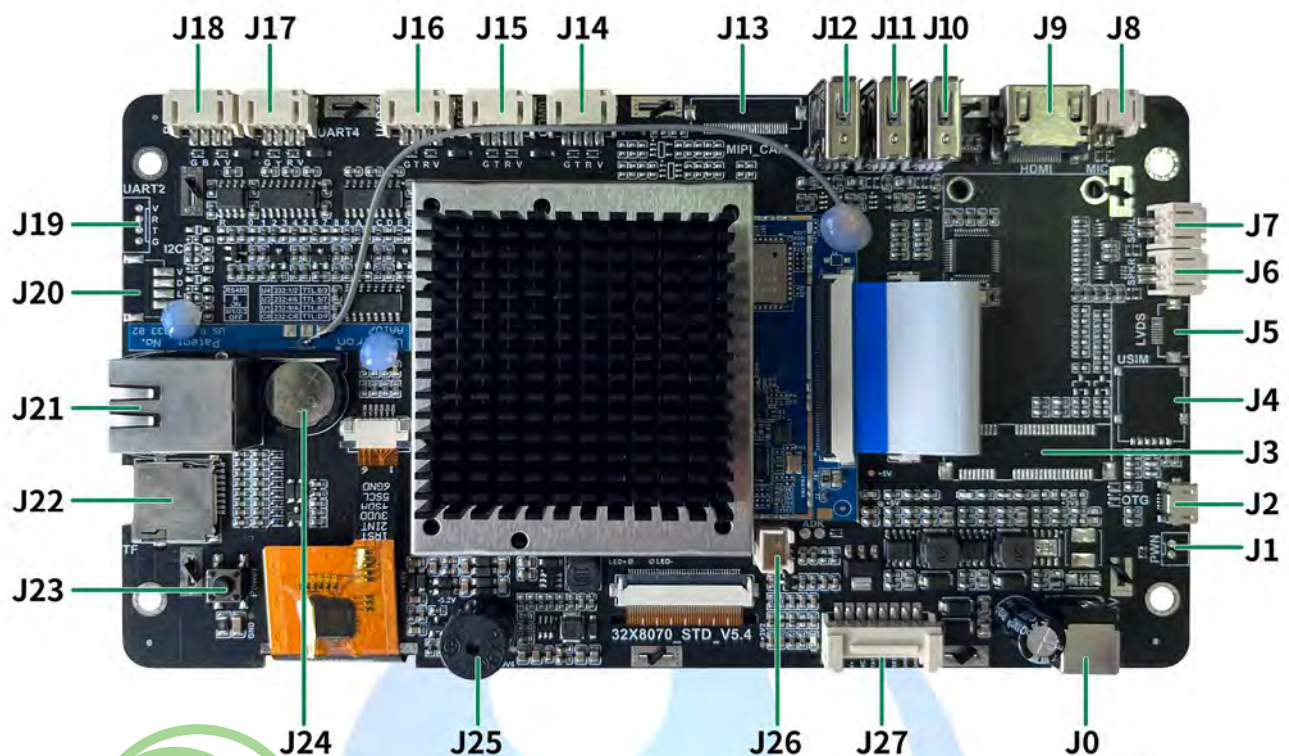

Num.	Interface Name	Description
J0	Power	12V/2A power supply (maximum voltage ranges from 6V to 16V DC)
J1	Wake-up	Control screen system on/off
J2	USB_Micro	OTG /App debugging/ Firmware upgrade interface
J3	MINI PCIE 4G	4G LTE Module/GPS (Optional)
J4	SIM card	Nano-SIM supported (Optional)
J5	LVDS interface	Reserved
J6	SPK_R	Right channel audio output interface
J7	SPK_L	Left channel audio output interface
J8	MIC	Audio input interface
J9	HDMI	HDMI output interface
J10	USB_HOST3	Support USB Peripherals
J11	USB_HOST2	Support USB Peripherals
J12	USB_HOST1	Support USB Peripherals/Support dual USB parallel use
J13	MIPI camera interface	Reserved
J14	COM0	Device name: COM0. Pin definition: 5V, RXD, TXD, GND
J15	UART1	Device name: ttyS1. Pin definition: 5V, RXD, TXD, GND
J16	UART3	Device name: ttyS3. Pin definition: 5V, RXD, TXD, GND
J17	UART4	Device name: ttyS4. Pin definition: 5V, RXD, TXD, GND/Same as J18 (J17 and J18 are mutually exclusive)
J18	RS485	Device name: ttyS4. Pin definition: 5V, RXD, TXD, GND/Same as J17

		(J17 and J18 are mutually exclusive)
J19	Debug interface	not open temporarily
J20	IIC communication	Pin definition: 5V, SDA, SCL, GND (Reserved)
J21	RJ45 interface	Support 10M/100M/1000M network
J22	TF card	Can do memory expansion
J23	Wake-up	Control screen system on/off
J24	RTC	Supply system RTC
J25	Buzzer	Buzzer
J26	Radiator interface	Reserved
J27	User interface	Pin Definition: 12V, 12V, NC, TXD, RXD, RXD, GND, GND

